


# SLC RF/AC-PUSHDIM TO DALI DT8 TW CONVERTER



RF for DALI Group and Scene Controller. Controlled by RF wall panel / remote control and converts the signal to DALI bus. Programmed for 1 DALI group or as broadcast. For Tunable White light sources.

Technical data	
Product ID	S21023
Number of DALI-address	1
DALI-bus power consumption	8 mA
Exterior color	White
Operating temperature	0°C ~ +40°C °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Suitable for constant current	Yes
Suitable for constant voltage	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	Yes
Dimming DMX	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	Yes
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	Yes
No dim function	No
Dimming DSI	No
Dimming interface	AC-Push
Input	
Electrical connection (Input)	L`N screw connection
Installation	

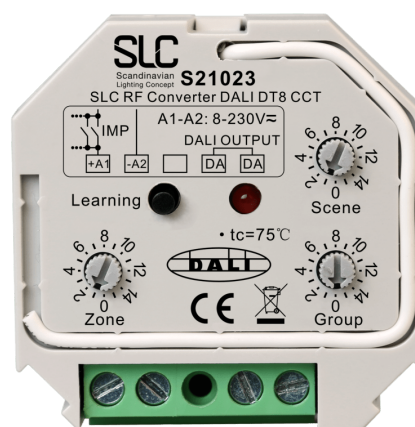

19.04.2024

Subject to changes and printing errors

Length	46 mm
Height	20.5 mm
Width	45 mm
Model	Static
Suitable for outdoor use	No
logistics data	
Brand	SLC