


SLC LED STRIP RGB CV 120 5M

12MM 22W 650LM IP20



High wattage RGB-strip for extra powerful light effects and high density of diodes. The combination of high wattage and high diode density gives bright colours that stands out.

Light technic	
Product ID	S14028
Beam angle	120 °, 120
Number of LED`s per meter	120
Efficacy	29.5 lm/W
Lumens pr. meter	650 lm
Lamp type	LED not exchangeable
Lamp power per meter	22 W/m
Number of nodes per meter	120 LED`s
Colour of light	RGB
Luminous flux per meter	650 lm/m
Rated life time L70/B50 at 25 ° C	50000 Hours
Lamp power per foot	6.6 W
Luminaire efficacy	29.5 lm/W
Number of nodes per foot	36
Technical data	
Cutting point, every	50 mm
Dimmable	Yes
IP class	IP20
LED-Strip length	5 m
Max length per connection:	5 meter m
Rated power per meter	22 W/m
Protection class	II
Type of control gear	LED operating device voltage-controlled
Suitable for dimmer	Yes
Degree of protection (IP)	IP20
Lamp voltage	24.0 - 24.0 V
Max. system power	110 W
Power factor	0.95
Input	
Voltage type	DC
Installation	

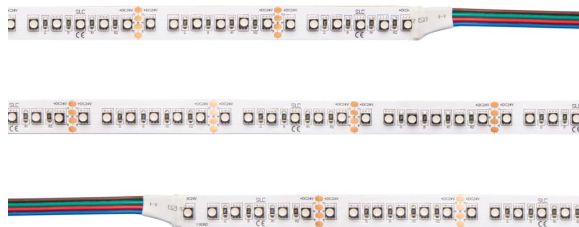

Length of particular segments	50 mm
Height/depth	3.5 mm
Length	5000 mm
Width	12 mm
Mounting method	Surface mounting/recessed mounting
Model	Strip
Conductor cross section	0.35 mm ²
Connection type	Solder
Self-adhesive	Yes
Number of poles	4
With protective cover	No
Lowest bending radius	20 mm
With connection set	No
With end piece	No
Type of wiring	Ending
logistics data	
Imported by	The Light Group
Brand	SLC
D-Pak	
D-pack length	550 mm
D-pack weight	13830 g
D-pack volume	71.775 dm ³
D-pack height/diameter	290 mm
D-pack quantity	80 pcs
D-pack width	450 mm
F-Pak	
F-pack width	270 mm
F-pack height	18 mm
F-pack weight	160 g
F-pack length	260 mm
M-Pak	
M-pack weight	3350 g
M-pack height	250 mm
M-pack width	220 mm
M-pack length	260 mm
Number	20
General data	
Pallet length	1200 mm

25.04.2024
Subject to changes and printing errors