


SLC LED-PANEL TUNABLE WHITE R600



LED-panel with dimmable light - and adjustable CCT

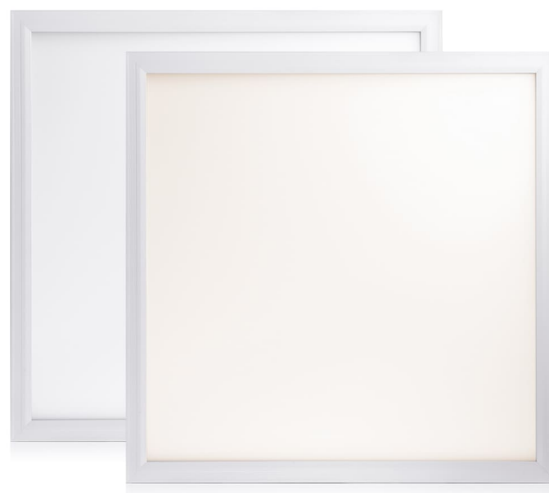

Light technic	
Product ID	B_SLC8711
Beam angle	Open beam/diffuse °
Lamp holder	Other
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light sharing	Symmetric
With light source	Yes
Colour temperature	3000.0 - 6500.0 K
Rated luminous flux according to IEC 62722-2-1	3200 lm
Colour of light	White
Rated life time L70/B50 at 25 °C	50000 Hours
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	89 lm/W
Technical data	
Protection class	III
Colour housing	White
Suitable for lamp power	36.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 40.0 °C
Power factor	0.9
Input	
Nominal voltage	8.0 - 48.0 V
Voltage type	DC
Installation	
Height/depth	8 mm
Built-in width	600 mm
Built-in height/depth	8 mm

17.04.2024
Subject to changes and printing errors

Length	600 mm
Built-in length	600 mm
Width	600 mm
Connection type	Push-in clamp
Suitable for suspended mounting	Yes
Number of poles	3
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Brand	SLC
Imported by	The Light Group
General data	
Type of grid	Matt