


# SLC ECO II R600 BASE 3600LM 830

## 36W MP



ECO II is one of our most sold luminaires! With a very attractive price /quality ratio. Stable high lumen output over time (L80B10). Long lifetime and 5 year warranty. Driver is sold separately.

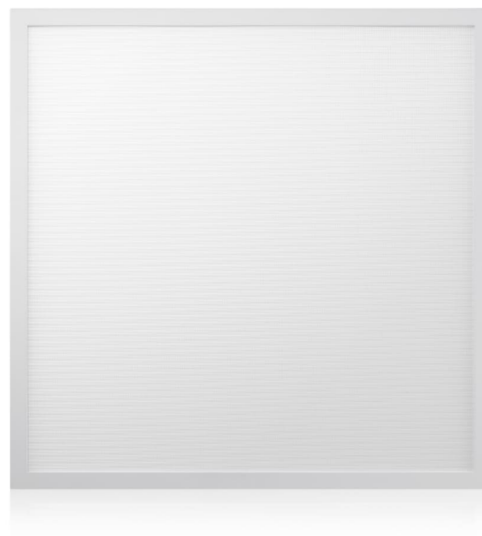

Light technic	
Product ID	SLC8732
Beam angle	Open beam/diffuse °
Lamp holder	Other
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Colour temperature	3000.0 - 3000.0 K
Rated luminous flux according to IEC 62722-2-1	3600 lm
Colour of light	White
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	100 lm/W
Technical data	
Protection class	III
Colour housing	White
Suitable for lamp power	36.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, structured
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 40.0 °C
Power factor	0.95
Input	
Voltage type	DC
Nominal voltage	8.0 - 48.0 V
Installation	
Height/depth	8 mm

26.04.2024  
Subject to changes and printing errors

Built-in width	600 mm
Built-in height/depth	8 mm
Length	595 mm
Built-in length	600 mm
Width	595 mm
Connection type	Push-in clamp
Suitable for suspended mounting	Yes
Number of poles	3
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Imported by	The Light Group
Brand	SLC
F-Pak	
F-pack width	50 mm
F-pack height	660 mm
F-pack weight	3500 g
F-pack length	700 mm
General data	
Type of grid	Matt
Pallet length	1200 mm
M-Pak	
M-pack weight	18500 g
M-pack height	680 mm
M-pack width	280 mm
M-pack length	720 mm
Number	5