




# LED-PANEL GIANT R620

The Giant LED panel is ideally suited for the new construction and renovation of an existing building where the customer wants high quality light which also provides significant energy savings and req

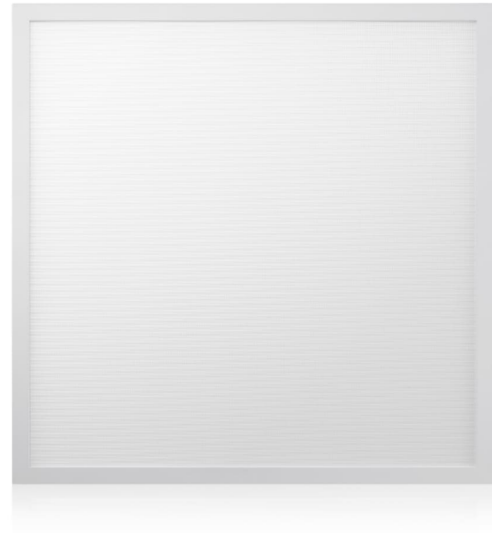

Light technic	
Product ID	B_SLC8748
Beam angle	Extreme wide beam >80°
Glare (UGR)	UGR<19
Lamp holder	Other
Colour rendering index CRI	90-100
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Colour of light	White
Rated life time L70/B10 at 25 °C	100000 Hours
Rated life time L90/B10 at 25 °C	50000 Hours
Light distributor	Diffuser lens/optic/panel
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Technical data	
Colour housing	White
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, structured
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	40 W
Rated ambient temperature according to IEC62722-2-1	-10 - 40 °C
Dimming depending on control gear	Yes
Power factor	0.9
Input	
Nominal voltage	220 - 240 V
Voltage type	AC/DC
Output	
LED nominal current at constant current	1050 - 1050 mA

10.12.2019

Subject to changes and printing errors

Installation	
Height/depth	8 mm
Built-in width	620 mm
Built-in height/depth	8 mm
Length	620 mm
Built-in length	620 mm
Width	620 mm
Connection type	Plug clamp
Suitable for suspended mounting	Yes
Number of poles	3
Suitable for built-in mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Brand	SLC
Imported by	The Light Group
General data	
Type of grid	Matt