


SLC GIANT R620 BASE 3600LM

4000K CRI90 40W MP



The Giant LED panel is ideally suited for the new construction and renovation of an existing building where the customer wants high-quality light which also provides significant energy savings and req

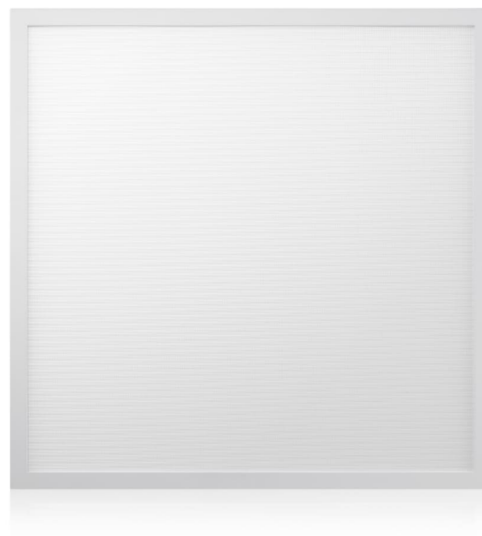

Light technic	
Product ID	SLC8749
Beam angle	120 °, Open beam/diffuse °
Expected lifetime	50 000
Light reduction	L90B10
Efficacy	90 lm/W
Luminous flux (lm)	3600
Glare (UGR)	UGR<19
Lamp holder	Other
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Colour temperature	4000.0 - 4000.0 K
Rated luminous flux according to IEC 62722-2-1	3600 lm
Colour of light	White
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	90 lm/W
Technical data	
Protection class	III
Colour housing	White
Suitable for lamp power	40.0 - 40.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, structured
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	40 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 40.0 °C
Power factor	0.9

19.04.2024

Subject to changes and printing errors

Input	
Voltage type	DC
Nominal voltage	8.0 - 47.0 V
Installation	
Height/depth	8 mm
Built-in width	620 mm
Built-in height/depth	8 mm
Length	620 mm
Built-in length	620 mm
Width	620 mm
Connection type	Push-in clamp
Suitable for suspended mounting	Yes
Number of poles	3
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Imported by	The Light Group
Brand	SLC
General data	
Type of grid	Matt