


# SLC RF/AC-PUSHDIM TO DALI DT8 RGB/RGBW CONVERTER



RF for DALI Group and Scene Controller. Controls RF wall panel / remote control and converter signal to DALI bus

Technical data	
Product ID	S21024
Number of DALI-address	1
DALI-bus power consumption	8 mA
Exterior color	White
Operating temperature	0°C ~ +40°C °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	Yes
Dimming DMX	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	Yes
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	Yes
No dim function	No
Dimming DSI	No
Dimming interface	PushDim
Input	
Electrical connection (Input)	L`N screw connection
Installation	
Length	46 mm
Height	20.5 mm

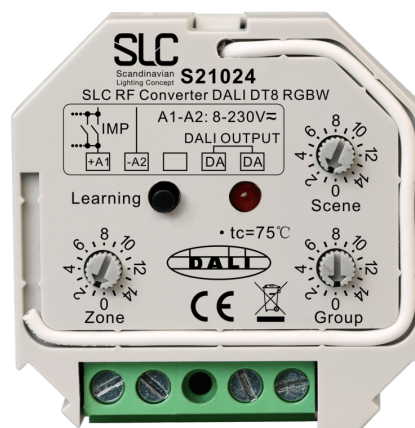

25.04.2024

Subject to changes and printing errors

Width	45 mm
Model	Static
Suitable for outdoor use	No
logistics data	
Imported by	The Light Group
Brand	SLC