




# SLC DMX CONTROLLER CV 4X5A 12-36V RGBW

Standard DMX512 compliant control interface enables to set the DMX address freely and show address Via digital numeric display.

Technical data	
Product ID	S26002
CE	Yes
Exterior color	White
Dimming curve (LED)	Logarithmic
Operating temperature	-20°C ~ +45°C °C
Expected lifetime (Ta 25°C)	110000 Hours
Expected lifetime (Ta 45°C)	50000 Hours
RoHs	Yes
Tc	75 °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Number of colour channels	4
Operating method	DMX
Dimming method	Pulse Width Modulation (PWM)
Dimming interface	DMX
Input	
Max input current	20.5 A
Strain relief	Yes
Input voltage	12 - 36 V
Output	
RGBW	Yes
Max total output power at 24VDC	480 W
Output type	Constant voltage (CV)
RGB	Yes
Output power per channel at 24VDC	120 W
Mono	Yes
Output power per channel	[60,180] W
Max. output current	20 mA
Max total output power	720 W
Output current per channel	[5,5] A
Tunable White	Yes

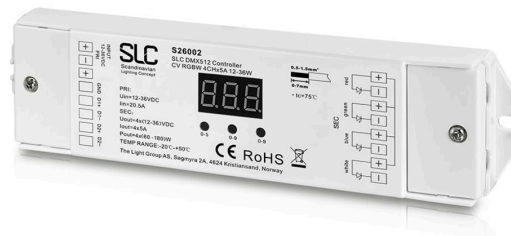

21.02.2020

Subject to changes and printing errors

<b>Number of LED Output Channels</b>	4
<b>Output voltage</b>	12 - 36 V
<b>Max output current</b>	20 A
<b>Installation</b>	
<b>Length</b>	178 mm
<b>Height</b>	22 mm
<b>Width</b>	46 mm
<b>Model</b>	Static
<b>Built-in</b>	Yes
<b>Surface-mounted</b>	Yes
<b>Suitable for outdoor use</b>	No
<b>DIN rail mounting</b>	No
<b>logistics data</b>	
<b>Brand</b>	SLC
<b>Imported by</b>	The Light Group
<b>General data</b>	
<b>GTIN</b>	7070938060318