


SLC POWER SUPPLY CV 24V 100W

PWM TRAILING EDGE



100W power supply with built-in PWM dimmer. Dimmed with phase-cut / section. Mono.

Technical data	
Product ID	S32081
Operating temperature	-20°C ~ +45°C °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Suitable for constant current	No
Suitable for constant voltage	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming DMX	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	Yes
Dimming phase cut-on	Yes
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dim function	No
Dimming DSI	No
Dimming interface	Trailing edge
Input	
Electrical connection (Input)	L`L`N`N screw connection
Power factor	0.95
Suitable for DC-voltage (primary side)	No
Output	

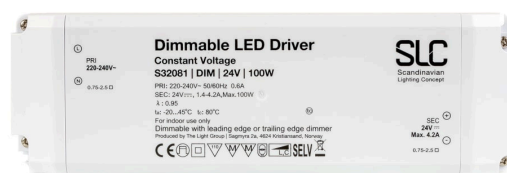

Output power	10.0 - 100.0 W
Output voltage	24.0 - 24.0 V
Output current	1400.0 - 4200.0 mA
Installation	
Length	210 mm
Height	34 mm
Width	67 mm
Model	Static
Suitable for outdoor use	No
logistics data	
Imported by	The Light Group
Brand	SLC
D-Pak	
D-pack length	235 mm
D-pack weight	900 g
D-pack height/diameter	365 mm
D-pack quantity	50 pcs
D-pack width	385 mm
F-Pak	
F-pack width	67 mm
F-pack height	210 mm
F-pack weight	360 g
F-pack length	34 mm
M-Pak	
M-pack weight	20 g
M-pack height	69 mm
M-pack width	36 mm
M-pack length	212 mm
Number	1