


SLC LED-PANEL LP FOCUS R595



Innovative and modern design. Developed towards high efficacy (140lm /W), long lifetime and low glare rating (UGR<16). The FOCUS panel is an all-around panel, combined with a wide range of drivers and output packages. Can be recessed or surface mounted. Perfect choice for projects aspiring to be carried out with sustainability focus, efficiency and reduced carbon footprint (BREEAM etc.).

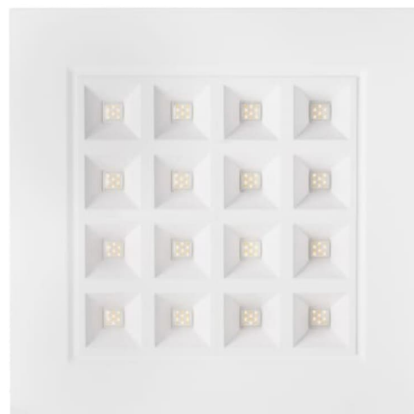

Light technic	
Product ID	B_SLC8762
Beam angle	Open beam/diffuse °
MacAdam (SDCM)	3
Glare (UGR)	UGR<16
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light sharing	Symmetric
With light source	Yes
Colour of light	White
Light distributor	Focal lens
Technical data	
CE	Yes
Protection class	II
Colour housing	White
Suitable for lamp power	27.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, opal
Impact strength	IK08
Degree of protection (IP)	IP40
Covering of the luminaire with thermally insulating material possible	No
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 45.0 °C
Filament test according to IEC 60695-2-11	750 °C - 30 s
Power factor	0.9
Input	
Voltage type	DC
Nominal voltage	33.0 - 38.0 V

25.04.2024
Subject to changes and printing errors

Installation	
Height/depth	36 mm
Built-in width	595 mm
Built-in height/depth	36 mm
Length	600 mm
Built-in length	595 mm
Width	600 mm
Conductor cross section	0.75 mm ²
Connection type	Push-in clamp
Suitable for suspended mounting	No
Number of poles	2
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Imported by	The Light Group
Brand	SLC
F-Pak	
F-pack width	62 mm
F-pack height	675 mm
F-pack length	645 mm
General data	
Type of grid	None
M-Pak	
M-pack height	695 mm
M-pack width	275 mm
M-pack length	665 mm
Number	5