


LED STRIP COB CV 512 5M 8MM 11W

935LM 930 IP20



• Special LED strip designed to achieve even light• 512 LEDs each meter make it easy to create a uniform line of light, even when using a low aluminium profile

| Light technic | |
|--|---|
| Product ID | S14043 |
| MacAdam (SDCM) | 3 |
| Beam angle | 120 |
| Colour rendering index CRI | 90-100 |
| Lamp type | LED not exchangeable |
| Lamp power per meter | 11 W/m |
| Number of nodes per meter | 512 LED's |
| Colour temperature | 3000 - 3000 K |
| Colour of light | White |
| Luminous flux per meter | 935 lm/m |
| Rated life time L80/B10 at 25 °C | 50000 Hours |
| Energy efficiency class of the built-in lamp | A++, A+, A (LED) |
| Technical data | |
| CE | Yes |
| IP class | IP20 |
| LED-Strip length | 5 m |
| Max length per connection: | 5 meter m |
| RoHs | Yes |
| Protection class | II |
| Type of control gear | LED operating device voltage-controlled |
| Degree of protection (IP) | IP20 |
| Lamp voltage | 24 - 24 V |
| Max. system power | 55 W |
| Input | |
| Electrical connection (Input) | 2 meter wire in each end |
| Voltage type | DC |
| Installation | |
| Length of particular segments | 62.5 mm |
| 3M adhesive tape | Yes |
| Height/depth | 1.5 mm |
| Length | 5000 mm |

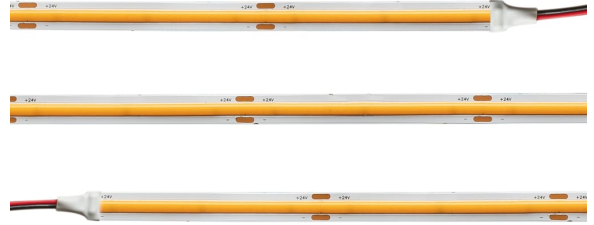

05.06.2020

Subject to changes and printing errors

| | |
|--------------------------------|------------------------------------|
| Width | 8 mm |
| Mounting method | Surface mounting/recessed mounting |
| Model | Strip |
| Conductor cross section | 0.35 mm ² |
| Number of poles | 2 |
| Type of wiring | Ending |
| logistics data | |
| Brand | SLC |
| Imported by | The Light Group |
| General data | |
| D-pack length | 250 mm |
| M-pack length | 365 mm |
| F-pack length | 215 mm |