


LED STRIP COB CV 512 5M 8MM 11W

935LM 927 IP20



• Special LED strip designed to achieve even light• 512 LEDs each meter make it easy to create a uniform line of light, even when using a low aluminium profile

Light technic	
Product ID	S14042
MacAdam (SDCM)	3
Beam angle	120
Colour rendering index CRI	90-100
Lamp type	LED not exchangeable
Lamp power per meter	11 W/m
Number of nodes per meter	512 LED`s
Colour temperature	2700 - 2700 K
Colour of light	White
Luminous flux per meter	935 lm/m
Rated life time L80/B10 at 25 °C	50000 Hours
Rated life time L80/B50 at 25 °C	54000 Hours
Rated life time L90/B10 at 25 °C	30000 Hours
Rated life time L90/B50 at 25 °C	30000 Hours
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Technical data	
CE	Yes
IP class	IP20
LED-Strip length	5 m
Max length per connection:	5 meter m
RoHs	Yes
Protection class	II
Type of control gear	LED operating device voltage-controlled
Degree of protection (IP)	IP20
Lamp voltage	24 - 24 V
Max. system power	55 W
Input	
Electrical connection (Input)	2 meter wire in each end
Voltage type	DC
Installation	
Length of particular segments	62.5 mm

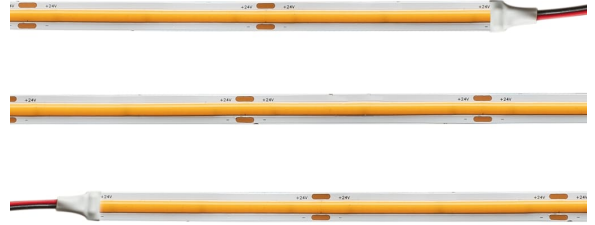

3M adhesive tape	Yes
Height/depth	1.5 mm
Length	5000 mm
Width	8 mm
Mounting method	Surface mounting/recessed mounting
Model	Strip
Conductor cross section	0.35 mm ²
Number of poles	2
Lowest bending radius	30 mm
Type of wiring	Ending
logistics data	
Brand	SLC
Imported by	The Light Group
General data	
D-pack length	520 mm
M-pack length	365 mm
F-pack length	215 mm