


LED STRIPS ULTRA LONG ICC 4,32W 20 METER



Low wattage strip, 4,3W/m. Suitable for visual decorative and accentual effects over long distances.

Light technic	
Product ID	B_S10029
Beam angle	120 °, 120
Colour rendering index (CRI/Ra)	80
Number of LED`s per meter	60
Type of light source	LED
MacAdam (SDCM)	3
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Lamp power per meter	4.3 W/m
Number of nodes per meter	60 LED`s
Colour of light	White
Rated life time L70/B10 at 25 °C	100000 Hours
Rated life time L70/B50 at 25 °C	120000 Hours
Rated life time L80/B10 at 25 °C	60000 Hours
Rated life time L80/B50 at 25 °C	75000 Hours
Rated life time L90/B10 at 25 °C	30000 Hours
Rated life time L90/B50 at 25 °C	35000 Hours
Lamp power per foot	1.29 W
Number of nodes per foot	18
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Technical data	
CE	Yes
Exterior color	White
Cutting point, every	100 mm
Dimmable	Yes
Dimming range	0-100% %
Input voltage	24 VDC
LED-Strip length	20 m
Max length per connection:	20 meter m
Operating temperature	-10°C ~ +45°C °C
Rated power per meter	4.3 W/m
RoHs	Yes

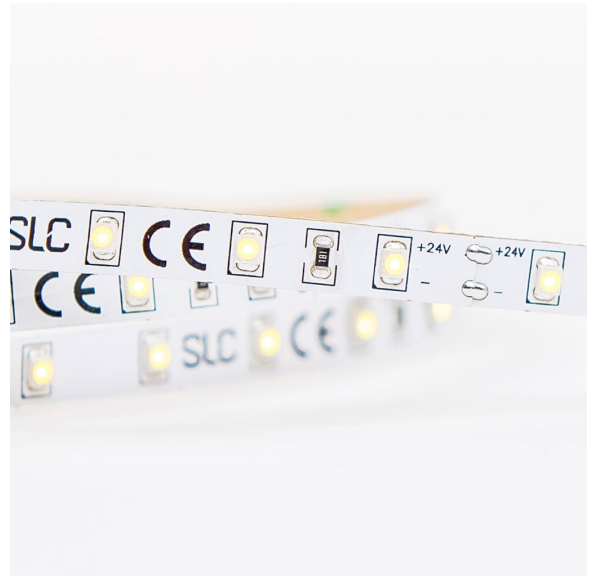

05.06.2020

Subject to changes and printing errors

Protection class	II
Type of control gear	LED operating device voltage-controlled
Lamp voltage	24 - 24 V
Max. system power	43 W
Technology	Constant current (CC)
Dimming method	Pulse Width Modulation (PWM)
Input	
Electrical connection (Input)	2 meter wire in each end
Voltage type	DC
Installation	
Length of particular segments	100 mm
3M adhesive tape	Yes
Length	20000 mm, 20000 mm
Mounting method	Surface mounting/recessed mounting
Model	Strip
Conductor cross section	0.35 mm ²
Connection type	Solder
Self-adhesive	Yes
Number of poles	2
Type of wiring	Ending
logistics data	
Brand	SLC
Imported by	The Light Group