


SLC LED-PANEL THINK R600X600

MICROPRISMATIC



LED-panel developed to meet increased standards. High efficacy values (145lm/W), including a wide range of drivers and output packages. Perfect choice for projects aspiring to be carried out with sustainability focus, efficiency and reduced carbon footprint (BREEAM etc.).

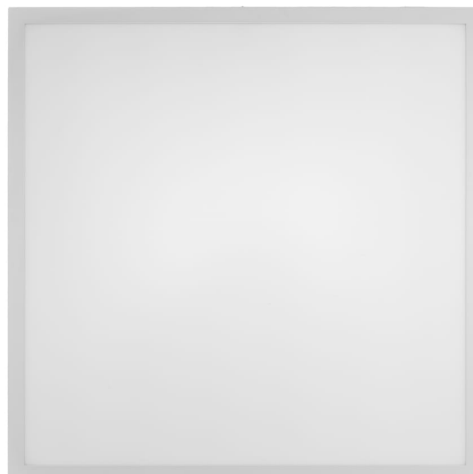

Light technic	
Product ID	B_SLC8750
Beam angle	Open beam/diffuse °
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light sharing	Symmetric
With light source	Yes
Colour of light	White
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	145 lm/W
Technical data	
CE	Yes
EMC	Yes
ENEC	Yes
RoHs	Yes
SELV	Yes
Protection class	III
Colour housing	White
Suitable for lamp power	27.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, structured
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 45.0 °C
Power factor	0.95
Input	
Voltage type	DC
Nominal voltage	27.0 - 36.0 V
Installation	

29.03.2024
Subject to changes and printing errors

Height/depth	36 mm
Built-in width	595 mm
Built-in height/depth	36 mm
Length	600 mm
Built-in length	595 mm
Width	600 mm
Conductor cross section	0.35 mm ²
Connection type	Push-in clamp
Suitable for suspended mounting	Yes
Number of poles	2
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
F-Pak	
F-pack width	62 mm
F-pack height	675 mm
F-pack length	645 mm
General data	
Type of grid	Matt