


SLC THINK R600X600 BASE 4976LM

3000K CRI80 36W MP



LED-panel developed to meet increased standards. High efficacy values (145lm/W), including a wide range of drivers and output packages. Perfect choice for projects aspiring to be carried out with sustainability focus, efficiency and reduced carbon footprint (BREEAM etc.).

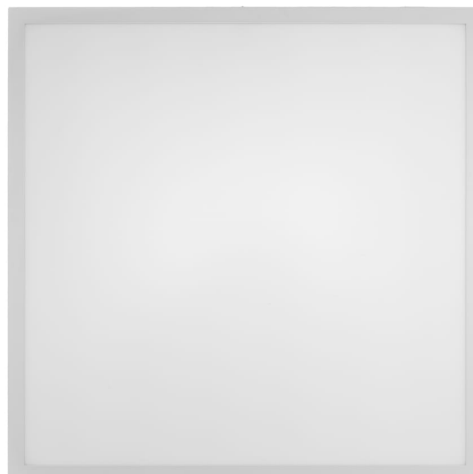

Light technic	
Product ID	SLC8750
Beam angle	Open beam/diffuse °
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Colour temperature	3000.0 - 3000.0 K
Rated luminous flux according to IEC 62722-2-1	4976 lm
Colour of light	White
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	145 lm/W
Technical data	
CE	Yes
Protection class	III
Colour housing	White
Suitable for lamp power	27.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, opal
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 45.0 °C
Power factor	0.95
Input	
Voltage type	DC
Nominal voltage	27.0 - 36.0 V
Installation	

25.04.2024
Subject to changes and printing errors

Height/depth	36 mm
Built-in width	595 mm
Built-in height/depth	36 mm
Length	600 mm
Built-in length	595 mm
Width	600 mm
Conductor cross section	0.35 mm ²
Connection type	Push-in clamp
Suitable for suspended mounting	Yes
Number of poles	2
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
D-Pak	
D-pack length	615 mm
D-pack weight	2350 g
D-pack height/diameter	45 mm
D-pack quantity	1 pcs
D-pack width	617 mm
F-Pak	
F-pack width	595 mm
F-pack height	35 mm
F-pack weight	1860 g
F-pack length	595 mm
General data	
Type of grid	Matt
M-Pak	
M-pack weight	14750 g
M-pack height	300 mm
M-pack width	646 mm
M-pack length	630 mm
Number	5
EPREL Data	
EPREL Energy Class	C