


# SLC LED-PANEL THINK R300X1200



LED-panel developed to meet increased standards. Highefficacy values (145lm/W), including a wide range of drivers and output packages. Perfect choice for projects aspiring to be carried out with sustainability focus, efficiency and reduced carbon footprint (BREEAM etc.).

Light technic	
Product ID	B_SLC8753
Beam angle	Open beam/diffuse °
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light sharing	Symmetric
With light source	Yes
Colour temperature	4000.0 - 4000.0 K
Rated luminous flux according to IEC 62722-2-1	5022 lm
Colour of light	White
Light distributor	Diffuser lens/optic/panel
Luminaire efficacy	145 lm/W
Technical data	
CE	Yes
Protection class	III
Colour housing	White
Suitable for lamp power	27.0 - 36.0
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Plastic, opal
Degree of protection (IP)	IP20
Control gear included	No
Max. system power	36 W
Rated ambient temperature according to IEC62722-2-1	-10.0 - 45.0 °C
Power factor	0.95
Input	
Voltage type	DC
Nominal voltage	27.0 - 36.0 V
Installation	
Height/depth	36 mm
Built-in width	295 mm

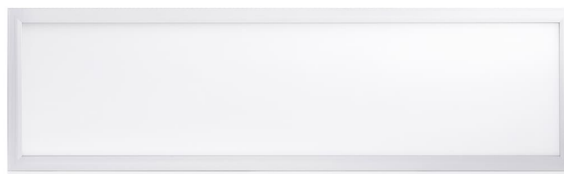

<b>Built-in height/depth</b>	36 mm
<b>Length</b>	1200 mm
<b>Built-in length</b>	1195 mm
<b>Width</b>	300 mm
<b>Conductor cross section</b>	0.35 mm <sup>2</sup>
<b>Connection type</b>	Push-in clamp
<b>Suitable for suspended mounting</b>	Yes
<b>Number of poles</b>	2
<b>Suitable for built-in mounting</b>	Yes
<b>Suitable for surface mounting</b>	Yes
<b>Type of wiring</b>	Suitable for through wiring
<b>Suitable for ceiling mounting</b>	Yes
<b>General data</b>	
<b>Type of grid</b>	Matt