




# SLC SMARTONE POWER SUPPLY CV 24V 75W RGB/RGBW ZIGBEE

SLC SmartOne 24V Constant Voltage PSU with built-in PWM-dimmer for RGB/RGBW 24V LED-strips. Communicates with Zigbee 3.0 and PushDim. Use Zigbee TouchLink for stand-alone wireless operation with our SmartOne Zigbee remotes. You can also connect the unit to a SmartHome hub/gateway. Works with most brands that use the Zigbee protocol.

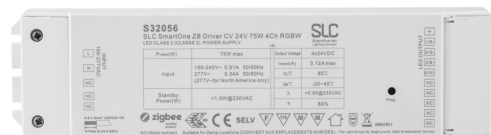

Technical data	
Product ID	S32056
CE	Yes
Exterior color	White
Dimming curve (LED)	Logarithmic
Dimming range	0-100% %
EMC	Yes
ENEC	Yes
Flicker free	Yes
Operating temperature	-20°C ~ +45°C °C
Expected lifetime (Ta 25°C)	110000 Hours
Expected lifetime (Ta 45°C)	50000 Hours
Over temperature protection	Yes
Over voltage protection	Yes
RoHs	Yes
SELV	Yes
Short circuit protection	Yes
Tc	85 °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Suitable for constant voltage	Yes
Dimming Zigbee	Yes
Dimming method	Pulse Width Modulation (PWM)
Dimming interface	Zigbee
Input	
Electrical connection (Input)	L`N screw connection
Power factor	0.95
Strain relief	Yes
Frequency range	[50,60] Hz
Inrush Current	2 A

21.10.2020

Subject to changes and printing errors

<b>Input voltage</b>	[100,277] V
<b>Output</b>	
<b>RGBW</b>	Yes
<b>Output power</b>	75 - 75 W
<b>Output type</b>	Constant voltage (CV)
<b>RGB</b>	Yes
<b>Mono</b>	Yes
<b>Max total output power</b>	75 W
<b>Tunable White</b>	Yes
<b>Number of LED Output Channels</b>	4
<b>Output voltage</b>	24 - 24 V
<b>Max output current</b>	3.12 A
<b>Installation</b>	
<b>Length</b>	244 mm
<b>Height</b>	32 mm
<b>Width</b>	64 mm
<b>Model</b>	Static
<b>logistics data</b>	
<b>Brand</b>	SLC
<b>Imported by</b>	The Light Group