


# SLC MINIONE FIXED DOWNLIGHT R25



SLC MiniOne Fixed is a stylish mini-downlight with high lumen output and a wide beam angle designed for decorative lighting. Get the final touch on your project with SLC MiniOne. Connect up to 6 downlights on one driver. It can be built-in or surface mounted with the MiniOne Tube accessory. IP44 (Front) / IP21 (Back).

Light technic	
Product ID	B_SLC1204
Beam angle	100 °, Extreme wide beam >80° °
Colour rendering index CRI	90-100
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Rated luminous flux according to IEC 62722-2-1	165 lm
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Light distributor	None
Luminaire efficacy	55 lm/W
Technical data	
Protection class	III
Surface protection	Powder coating
Type of control gear	LED operating device current-controlled
Material housing	Aluminium
Material cover	Other
Degree of protection (IP)	IP44
Control gear included	No
Max. system power	3 W
Adjustability	Not adjustable
Dimming phase cut-off	Yes
Input	
Voltage type	DC
Nominal voltage	3.0 - 18.0 V
Installation	
Height/depth	18 mm
Built-in height/depth	16 mm
Outer diameter	32 mm

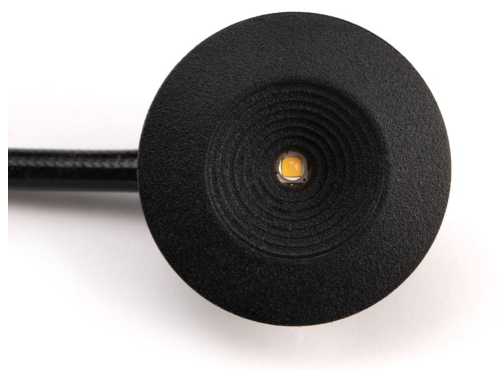

28.03.2024  
Subject to changes and printing errors

Conductor cross section	0.35 mm2
Connection type	Push-in clamp
Number of poles	2
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
F-Pak	
F-pack width	60 mm
F-pack height	57 mm
F-pack length	80 mm