


SLC LED STRIP COB CV 512 5M 8MM

11W 895LM 3000K CRI90 IP54



Special LED strip designed to achieve a completely uniform light. 512 LEDs per meter make it easy to create an even line of light, even when using a low aluminum profile. This strip is IP54 rated, which opens up even more possibilities.

| Light technic | |
|-------------------------------|---|
| Product ID | S14057 |
| MacAdam (SDCM) | 3 |
| Beam angle | 120 |
| Colour rendering index CRI | 90-100 |
| Lamp type | LED not exchangeable |
| Lamp power per meter | 11 W/m |
| Number of nodes per meter | 512 LED`s |
| Colour of light | White |
| Luminous flux per meter | 895 lm/m |
| Luminaire efficacy | 81.4 lm/W |
| Technical data | |
| CE | Yes |
| Cutting point, every | 31 mm |
| IP class | IP54 |
| LED-Strip length | 5 m |
| Max length per connection: | 5 meter m |
| Protection class | II |
| Type of control gear | LED operating device voltage-controlled |
| Suitable for dimmer | Yes |
| Degree of protection (IP) | IP54 |
| Lamp voltage | 24.0 - 24.0 V |
| Max. system power | 55 W |
| Input | |
| Electrical connection (Input) | 2 meter wire in each end |
| Voltage type | DC |
| Installation | |
| Length of particular segments | 31.25 mm |
| Height/depth | 2 mm |
| Length | 5000 mm |
| Width | 8.4 mm |

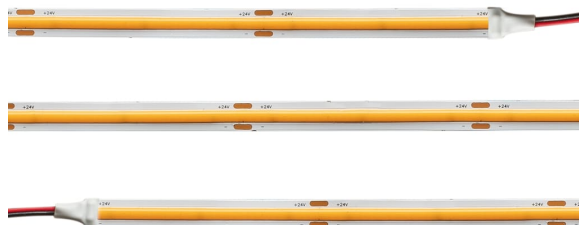

| | |
|-------------------------|------------------------------------|
| Mounting method | Surface mounting/recessed mounting |
| Model | Strip |
| Conductor cross section | 0.5 mm ² |
| Self-adhesive | Yes |
| Number of poles | 2 |
| With protective cover | Yes |
| With end piece | Yes |
| Type of wiring | Ending |
| logistics data | |
| Imported by | The Light Group |
| Brand | SLC |
| D-Pak | |
| D-pack length | 250 mm |
| D-pack weight | 13000 g |
| D-pack height/diameter | 520 mm |
| D-pack quantity | 100 pcs |
| D-pack width | 395 mm |
| F-Pak | |
| F-pack width | 240 mm |
| F-pack height | 12 mm |
| F-pack weight | 120 g |
| F-pack length | 215 mm |
| M-Pak | |
| M-pack weight | 3000 g |
| M-pack height | 240 mm |
| M-pack width | 240 mm |
| M-pack length | 365 mm |
| Number | 25 |
| EPREL Data | |
| EPREL Energy Class | F |