

SLC LED STRIP 3D MONO CV 3X60


5M 10MM 14,4W 1150LM 2700K CRI80

IP20



3-Way is an LED strip that illuminates both upwards and to both sides. For use in installations where light is required in all directions.

Light technic	
Product ID	S14031
Beam angle	180
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Lamp power per meter	14.4 W/m
Number of nodes per meter	180 LED`s
Colour temperature	2700.0 - 2700.0 K
Colour of light	White
Luminous flux per meter	1150 lm/m
Lamp power per foot	4.32 W
Luminaire efficacy	79.9 lm/W
Number of nodes per foot	54
Technical data	
Cutting point, every	100 mm
IP class	IP20
LED-Strip length	5 m
Max length per connection:	5 meter m
Protection class	II
Type of control gear	LED operating device voltage-controlled
Suitable for dimmer	Yes
Degree of protection (IP)	IP20
Lamp voltage	24.0 - 24.0 V
Max. system power	72 W
Power factor	0.95
Input	
Voltage type	DC
Installation	
Length of particular segments	100 mm
Height/depth	2 mm
Length	5000 mm

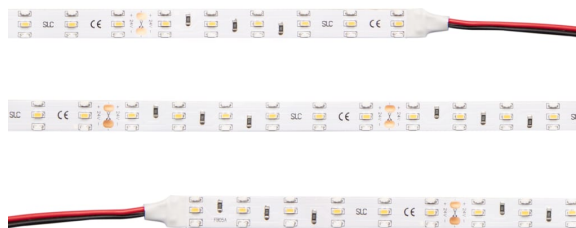

Width	10 mm
Mounting method	Surface mounting/recessed mounting
Model	Strip
Conductor cross section	0.35 mm ²
Connection type	Solder
Self-adhesive	Yes
Number of poles	2
With protective cover	No
Lowest bending radius	20 mm
With connection set	No
With end piece	No
Type of wiring	Ending
logistics data	
Imported by	The Light Group
Brand	SLC
D-Pak	
D-pack length	550 mm
D-pack weight	17600 g
D-pack volume	71.775 dm ³
D-pack height/diameter	450 mm
D-pack quantity	100 pcs
D-pack width	290 mm
F-Pak	
F-pack width	190 mm
F-pack height	12 mm
F-pack weight	170 g
F-pack length	205 mm
M-Pak	
M-pack weight	4400 g
M-pack height	250 mm
M-pack width	220 mm
M-pack length	260 mm
Number	25
EPREL Data	
EPREL Energy Class	F
General data	
Pallet length	1200 mm